




Harness K2[®] 5 POINTS

The premium range of JSP harnesses. Designed for intensive use to be a comfortable, effective and ergonomic equipment with the highest standard of safety.


TECHNICAL SPECIFICATION

HEIGHT SAFETY

FAR0403

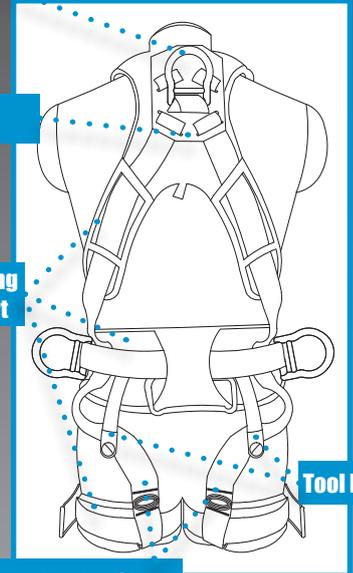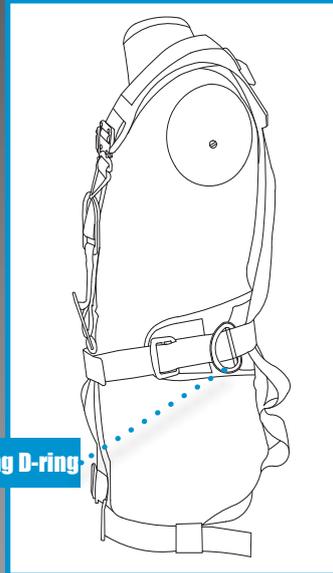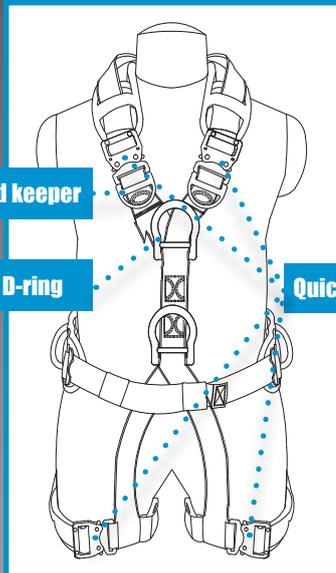

Stitching pattern



METAL COMPONENTS

Material: Alloy steel, D-ring in aluminium alloy
 Finish: Black Powder coated
 Breaking strength: 23 kN D-ring (15kN buckles and frames)

STITCHING THREAD

Material: High-tenacity polyester

DIMENSIONS

Size: Universal
 Weight: 2500 g (+/- 10 g)

CLEANING & MAINTENANCE

Maintenance of this Safety Harness must only be carried out by a trained and competent person who will:
 Clean the product using the following procedure: using only warm water, using only mild detergent, using only a sponge or soft nylon brush, using fresh clean water to rinse the detergent off the Safety Harness, drip dry the equipment allowing the Safety Harness to thoroughly dry out before next use.
 Ensure that the following cleaning methods are NOT used: water over 40° C, bleach, any detergent not suitable for bare skin, wire brushes or other scouring agents, jet wash or other power products, radiators or other direct heat sources, ensure that a thorough visual and tactile examination of the lanyard is made after cleaning, before the item is allowed to be re-used.

WEBBING

Material: Polyester
 Width: 44+-1 mm
 Breaking strength: 23 kN

CHARACTERISTICS

- One dorsal attachment D-ring for fall arrest
- Two front textile loops for fall arrest
- Adjustable & elasticated leg straps
- Adjustable shoulders straps with lanyard keepers
- Adjustable waist straps, sit straps
- Polyester paddings for extra comfort (legs, back and waist)
- Work positioning ergonomic belt with 2 lateral D-rings incorporated
- Tool keepers on the belt
- Labels of inspection and instructions protected in a black PVC pouch
- One front D-ring at waist level for rope access
- Quick release buckles for an easy donning

CONFORMITY

EN 361: 2002, EN 358: 1999 & EN 813: 2008 Rated to 136 kg
 The lifespan of the product is 10 years from the date of manufacture subject to passing necessary checks and inspection by a competent person.
 Static strength: 15 kN of 1530 kgf for 3 min at each attachment element
 Dynamic strength: Free fall from 4 m height donned to a test dummy weighing 100 kg at each attachment element



MANUFACTURING FOR SAFETY
 WWW.JSPSAFETY.COM

UKSALES@JSP.CO.UK
 TEL: +44 (0)1993 826050



Issued 07/08/2018. V1